

SPECIFICATION

NO.:PJT430P01H29-200P40N

ACCEPTED BY CUSTOMER	
----------------------------	--

Product: 4.3" TFT 480(RGB) *272 Pixels

Verson: V00

Date: 2013/06/01

APPROVED	CHECKED	PREPARED

深圳市鹏基光电科技有限公司
地址(Address): 深圳市布吉镇上李朗中盛科技园 7 栋 5 楼
电话(Tel): 86-0755-84507355
传真(Fax): 86-0755-25776829

深圳鹏基光电有限公司

Shenzhen PengJi Photoelectricity Co., Ltd.

Catalog:

N0.	Contents	Page
1	History Verson	1
2	Mechanical Description	2
3	Mechanical Drawing	3
4	Interface Definition	4
5	Interface Timing	5-6
6	Absolute Maximum Ratings	7
7	DC Characteristics	7
8	Blacklight	7-8
9	Optical Specification	8-9
10	Reliability testing	10
11	Inspection Standard	11-12
12	Precaution	12-13

深圳鹏基光电有限公司

Shenzhen PengJi Photoelectricity Co., Ltd.

1. History Verson

Sample version	Doc. version	Date	Discription	Modify
V00	V00	2013-06-01	First issue	Ljj

2. Mechanical Description

深圳鹏基光电有限公司

Shenzhen PengJi Photoelectricity Co., Ltd.

Name	Content	Unit
Outline Size	105.50 (W) * 67.20 (H) * 2.90(T)	mm
Module size	4.3 (V.A)	inch
Resolution	480(RGB)* 272 Pixels	—
Viewing size	95.04(W) * 53.86(H)	mm
Pixel size	0.198 * 0.198	mm
LCD Type	TFT (262K)/ Transmissive / Positive	—
Viewing Angle	6 H	—
Driver IC	ILI6480BQ	—
Backlight Type	7 LED Serial	—
Interface Type	24 Bit RGB	—

3. Mechanical Drawing

深圳鹏基光电有限公司

Shenzhen PengJi Photoelectricity Co., Ltd.

4. Interface Definition

PIN NO.	PIN Name	Funtion Description
---------	----------	---------------------

深圳鹏基光电有限公司

Shenzhen PengJi Photoelectricity Co., Ltd.


1	VLED-	back light power supply negative
2	VLED+	back light power supply positive
3	GND	Ground
4	VDD	Power supply
5-12	R0-R7	Red Data
13-20	G0-G7	Green Data
21-28	B0-B7	Blue Data
29	GND	Ground
30	CLK	Colock signal
31	DISP	Display on/off
32	HSYNC	Horizontal sync input in RGB mode(short to GND if not used)
33	VSYNC	Vertical sync input in RGB mode(short to GND if not used)
34	DE	Data enable
35	NC	No Connection
36	GND	Ground
37	NC (XR)	Not connect(touch panel X-right)
38	NC (YD)	Not connect(touch panel Y-bottom)
39	NC (XL)	Not connect(touch panel X-left)
40	NC (YU)	Not connect(touch panel Y-up)

5. Interface Timing:

5.1 Reset Timing


深圳鹏基光电有限公司

Shenzhen PengJi Photoelectricity Co., Ltd.

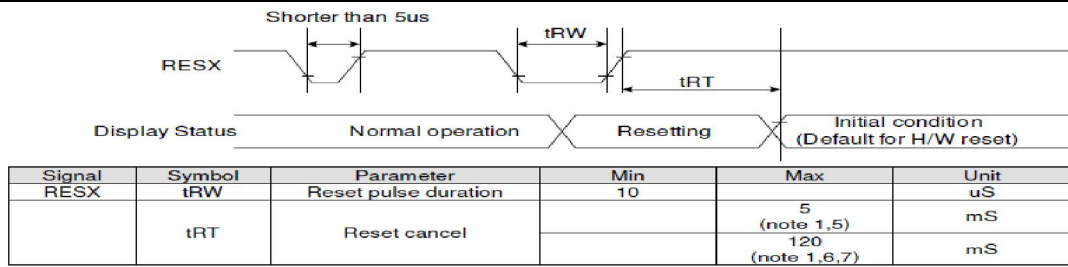

5.2 RGB Interface Timing

(HV Mode)

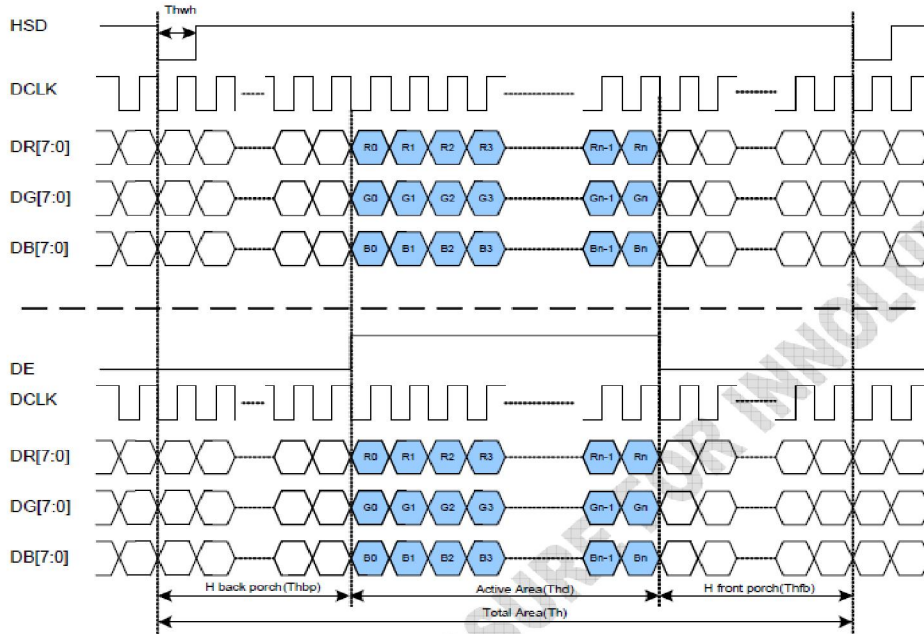


Parallel RGB input timign table

Parameter	Symbol	Value			Unit
		Min.	Typ.	Max.	
DCLK frequency	fclk	5	9	12	MHz
VSD period time	Tv	277	288	400	H
VSD display area	Tvd	272			H
VSD back porch	Tvb	3	8	31	H
VSD front porch	Tvfp	2	8	97	H
HSD period time	Th	520	525	800	DCLK
HSD display area	Thd	480			DCLK
HSD back porch	Thbp	36	40	255	DCLK
HSD front porch	Thfp	4	5	65	DCLK

5.3 AC Timing Diagram

深圳鹏基光电有限公司

Shenzhen PengJi Photoelectricity Co., Ltd.

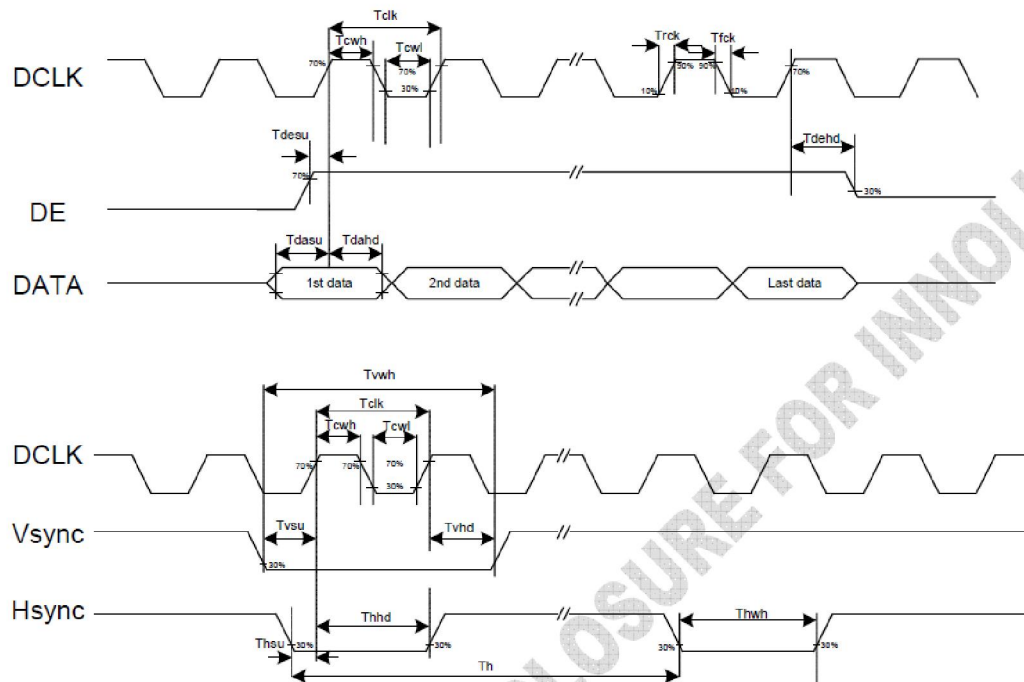

DCLK clock time	Tclk	33.3	-	-	ns	DCLK=30MHz
DCLK clock low period	Tcwl	40	-	60	%	
DCLK clock high period	Tcwh	40	-	60	%	
Clock rising time	Trck	9	-	-	ns	
Clock falling time	Tfck	9	-	-	ns	
HSD width	Thwh	1	-	-	DCLK	
HSD period time	Th	55	60	65	us	
HSD setup time	Thsu	12	-	-	ns	
HSD hold time	Thhd	12	-	-	ns	
VSD width	Tvwh	1	-	-	Th	
VSD setup time	Tvsu	12	-	-	ns	
VSD hold time	Tvhd	12	-	-	ns	
Data setup time	Tdasu	12	-	-	ns	
Data hold time	Tdahd	12	-	-	ns	
DE setup time	Tdesu	12	-	-	ns	
DE hold time	Tdehd	12	-	-	ns	
Source output setting time	Tsst	-	-	TBD	us	10% to 90% CL=60pF, RL=2Kohm
Gate output setting time	Tgst	-	-	TBD	ns	10% to 90%, CL=60pF
VCOM output setting time	Tcst	-	-	TBD	us	10% to 90%, CL=40nF, RL=50ohm
Time from VSD to 1st line data input	Tvs	3	8	31	Th	HV mode By HDL[4:0] setting

6. Absolute Maximum Ratings:

Name	symbol	Min	Type	Max	Unit
------	--------	-----	------	-----	------

深圳鹏基光电有限公司

Shenzhen PengJi Photoelectricity Co., Ltd.

Operation Temperature	T _{OP}	-20	-	70	℃
Storage Temperature	T _{ST}	-30	-	80	℃

7. DC Characteristics

Name	Symbol	Min	Type	Max	Unit
Logical Voltage	V _{DD}	3.1	3.3	3.5	V
Input High Voltage	V _{IH}	0.8I _{OVCC}	-	I _{OVCC}	V
Input Low Voltage	V _{IL}	-0.3	-	0.2I _{OVCC}	V
Output High Voltage	V _{OH}	0.8I _{OVCC}	-	-	V
Output Low Voltage	V _{OL}	-	-	0.2I _{OVCC}	V
Current Consumption	I _{DD}	-	-	25	mA

8. Blacklight:

Name	Min	Type	Max	Unit
Current	-	20	25	mA
Voltage	-	22.4	24.5	V
Power Consumption	-	448	-	mW
luminance	200	200	-	CD/M ² (Note1)
Luminance uniformity	75%	80%	-	(Note2)
X Color Coordinates	0.27	0.28	0.31	-
Y Color Coordinates	0.27	0.28	0.31	-

Note1: This luminance is tested with assembling the LCD.

Note2: Definition of Luminance Uniformity.

深圳鹏基光电有限公司

Shenzhen PengJi Photoelectricity Co., Ltd.

Active area is divided into 9 measuring areas (Refer to Fig. 4-4).Every measuring point is placed at the center of each measuring area.

$$\text{Luminance Uniformity (Yu)} = \frac{B_{\min}}{B_{\max}}$$

L-----Active area length W----- Active area width

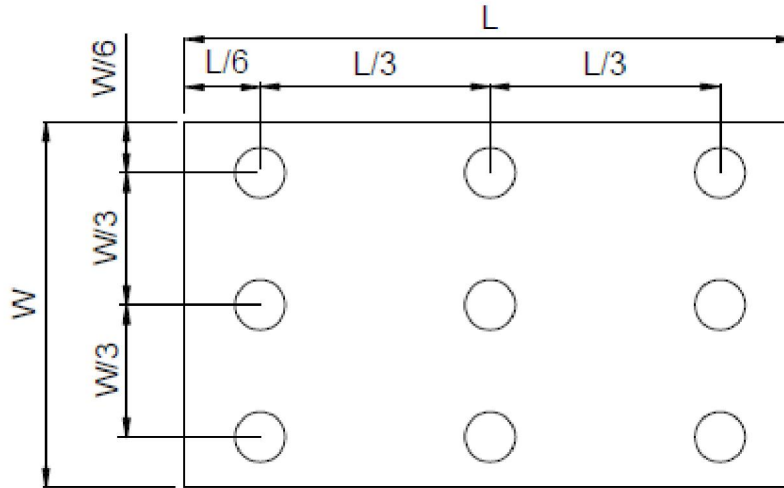


Fig. 4-4 Definition of measuring points

$B_{\max}$: The measured maximum luminance of all measurement position.

$B_{\min}$: The measured minimum luminance of all measurement position.


9. Optical Specification

Name	Symbol	Min	Type	Max	Unit
Transmittance rate	T (%)	—	4.6	—	%
Contrast ratio	C/R	400	500	—	—
Response time	Tr+Tf	—	45	—	ms
Viewing Angle	θU	40	50	—	degree (C/R>10)
	θD	60	70	—	
	θL	60	70	—	
	θR	60	70	—	

*Viewing angle descriptin:

深圳鹏基光电有限公司

Shenzhen PengJi Photoelectricity Co., Ltd.

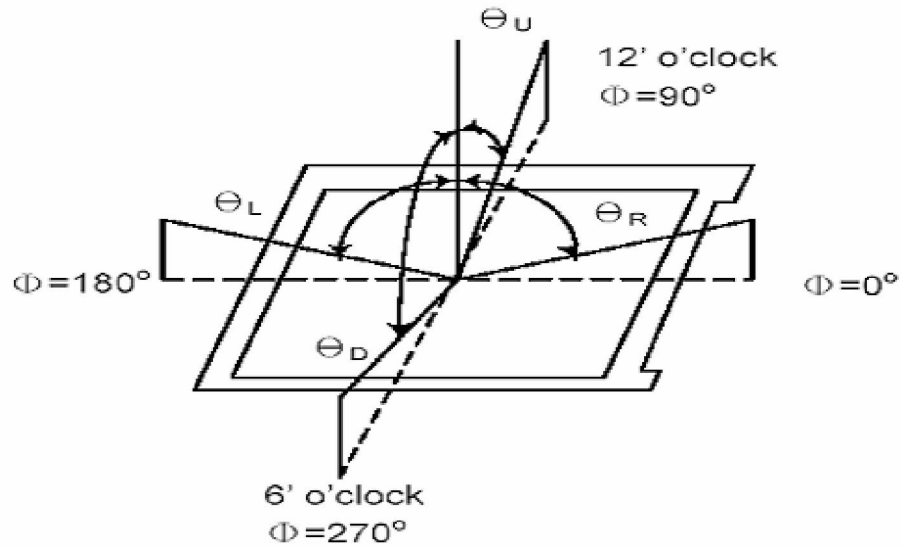


*Contrast rate description(CR) :

Tested in the center of the LCM panel

$$CR = \frac{\text{Luminance with all pixels white}}{\text{Luminance with all pixels black}}$$

*Response time description : Sum of TR and TF

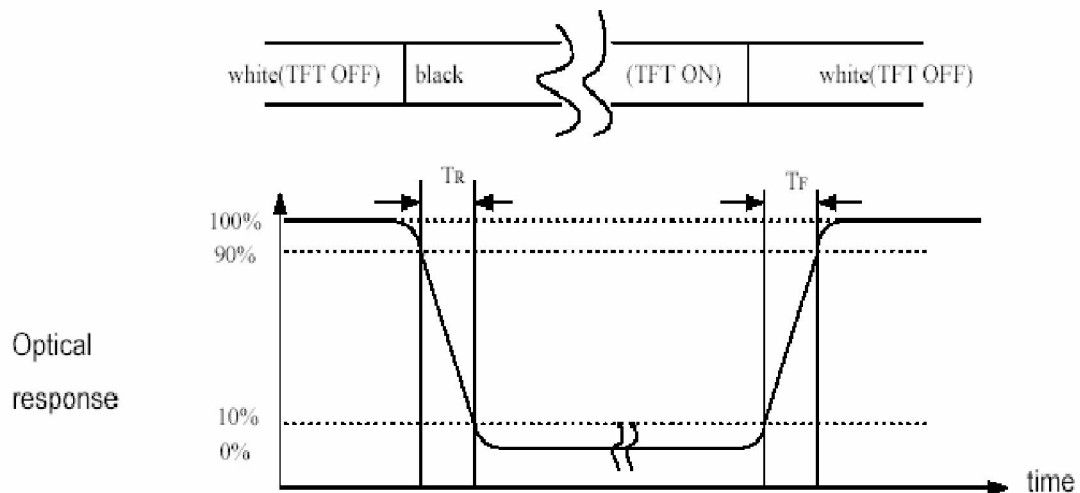

10. Reliability testing:

深圳鹏基光电有限公司

Shenzhen PengJi Photoelectricity Co., Ltd.

Item No	Name	Condition	Remark
1	High temperature Operating	70° C , 168Hours	Finish product (With polarizer)
2	Low temperature Operating	-20° C , 168 Hours	Finish product (With polarizer)
3	High temperature Storage	80° C , 168 Hours	Finish product (With polarizer)
4	Low temperature Storage	-30° C , 168 Hours	Finish product (With polarizer)
5	High temperature & humidity Storage	60° C , 90%RH, 168 Hours	Finish product (With polarizer)
6	Thermal Shock Storage(No operation)	-20° C , 30min.<=> 70° C , 30min. 10 Cycles	Finish product (With polarizer)
7	ESD test	Voltage:+8KV R:330 ohm, C:150pF Air discharge, 10 times	Finish product (With polarizer)
8	Vibration test	10 => 55 =>10 => 55 => 10 Hz, within 1 minute;Amplitude:1.5mm. 15 minutes for each Direction (X, Y, Z)	Finish product (With polarizer)
9	Drop test	Packed, 100CM free fall 6 sides, 1 corner, 3edges	Finish product (With polarizer)

*One single product test for only one item.

* Judgment after test: keep in room temperature for more than 2 hours.

- Current consumption < 2 times of initial value
- Contrast > 1/2 initial value
- Function: work normally

11. Inspection Standard

11.1 Defect Definition



深圳鹏基光电有限公司

Shenzhen PengJi Photoelectricity Co., Ltd.

11.2 Standard

No.	Defect Class	Defination	Content
1	重缺陷 (MA)	影响显示的功能缺陷	短路、断路、缺划、大电流、视角错、漏液、显示不清等
		严重外观缺陷	产品尺寸不符、漏部品等
2	轻缺陷 (MI)	不影响产品功能, 但对产品外观有影响	反黑 / 反白点、偏光片缺陷、针孔、污点

No.	Item	Inspection Standard	Classification of defects
1	显示状态	不显、显示乱码、多划、少划、少画面、视角错、闪烁等均不允许	重缺陷
		无法用文字描述的现象, 必要时制定限度样板进行参考。如: 显示不均、显示浓淡、斜纹等	
		显示的颜色效果参照开发、工程样品或按限度样板判定	
		画面切换过程中可见(但非画异)之不良现象(暂停画面时不良现象不可见)不作管控, 客户有特殊要求时依客户要求;	轻缺陷
		仅点背光不显示画面下可见不良现象(但显示画面时不良现象不可见)不作管控, 客户有特殊要求时依客户要求;	轻缺陷
2	背光	LED 灯不亮或闪烁不稳定不允许	重缺陷
		背光电流: 超出规格范围不允许	
		亮眼、漏光: 进入 LCD 的 A、B 区不允许, 必要时按限度样板做判定	轻缺陷
		背光颜色: 根据样品、规格书判定	轻缺陷
		亮度与发光均匀度参照开发、工程或限度样板判定	轻缺陷

No.	Item	Inspection Standard			Classifi- cation of defects
3	显示黑点	直径（ $\Phi = (X+Y) / 2$ ）	允收数	图示	11 轻缺陷
		$\Phi \leq 0.1$ （密集不可）	不计		
		$0.1 < \Phi \leq 0.15$ [注2]	2		
	白点 针	$0.15 < \Phi \leq 0.2$	1		
		$\Phi > 0.2$	0		
		注1. 包括：黑点、白点、针孔、异物。 注2. 整个产品不允许超过2个点, 且			

12. Precaution

12.1 Handling

- (1) Protect the panel from static, it may cause damage to the CMOS Gate Array IC.
- (2) Use fingerstalls with soft gloves in order to keep display clean during the incoming inspection and assembly process.
- (3) If the liquid crystal material leaks from the panel, it should be kept away from the eyes or mouth. In case of contact with hands, legs or clothes, it must be washed away thoroughly with soap.
- (4) The desirable cleaners are water, IPA (Isopropyl Alcohol) or Hexane. Don't use Ketone type materials (ex. Acetone), Ethyl alcohol, Toluene, Ethyl acid or Methyl chloride. It might permanent damage to the polarizer due to chemical reaction.
- (5) Pins of I/F connector shall not be touched directly with bare hands.
- (6) Refrain from strong mechanical shock and / or any force to the panel. In addition to damage, this may cause improper operation or damage to the panel.
- (7) Note that polarizers are very fragile and could be easily damaged. Do not press or scratch the surface harder than a B pencil lead.
- (8) Wipe off water droplets or oil immediately. If you leave the droplets for a long time, staining and discoloration may occur.
- (9) If the surface of the polarizer is dirty, clean it using some absorbent cotton or soft cloth.

12.2 Storage

- (1) Do not leave the panel in high temperature, and high humidity for a long time. It is highly recommended to store the panel with temperature from 0 to 35°C and relative humidity of less than 70%.
- (2) The panel shall be stored in a dark place. It is prohibited to apply sunlight or fluorescent light during the store.

12.3 Operation

- (1) The LCD shall be operated within the limits specified. Operation at values outside of these limits may shorten life, and/or harm display images.
- (2) Do not exceed the absolute maximum rating value. (the supply voltage variation, Input voltage variation in part contents and environmental temperature

深圳鹏基光电有限公司

Shenzhen PengJi Photoelectricity Co., Ltd.

and so on).Otherwise the panel may be damaged.

(3) If the panel displays the same pattern continuously for a long period of time, it can be the situation when the image" Sticks" to the screen.